



FIBERGLASS EQUIPMENT MOUNTS

2" Equipment Mounts

7-hole Clover



Material Specifications

Pole Gain




- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153 (6" to 8" mounting centers)
- Back-to-back & Jump proof pole gain options
- Accepts 5/8" pole mounting hardware
- Can be banded using the Aluma-Form Bolt-A-Band™ banding system

End Fitting

- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153

Fiberglass Rod

- 2" diameter Super-Smooth™, proprietary veiled gray polyester rod with added ultraviolet protection

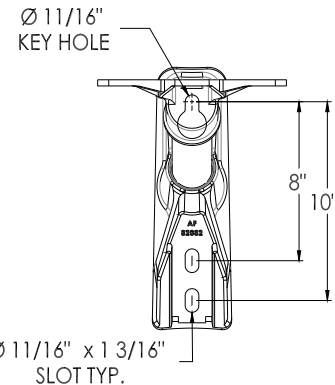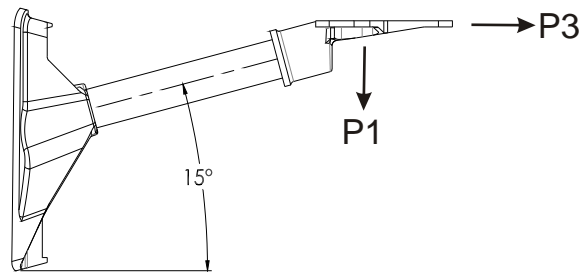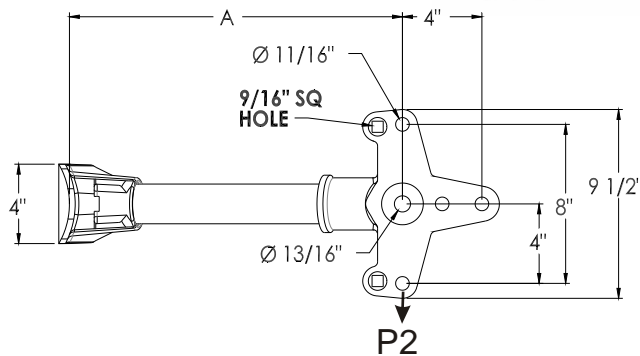

Catalog Name	Rod Diameter	Length "A"	Hardware	Ultimate Load			Weight
				P1 (lbs)	P2 (lbs)	P3 (lbs)	
F1CA-HV-A12-JC7	2	12	No	3000	1800	10000	15.2#
F1CA-HV-A18-JC7	2	18	No	2250	1500	10000	15.9#
F1CA-HV-A24-JC7	2	24	No	1750	1100	10000	16.6#
F1CA-HV-A12-BC7	2	12	No	3000	1800	10000	15.1#
F1CA-HV-A18-BC7	2	18	No	2250	1500	10000	15.8#
F1CA-HV-A24-BC7	2	24	No	1750	1100	10000	16.5#
F1CA-HV-A12-JC7-H	2	12	No	3000	1800	10000	15.6#
F1CA-HV-A18-JC7-H	2	18	No	2250	1500	10000	16.3#
F1CA-HV-A24-JC7-H	2	24	No	1750	1100	10000	17.0#
F1CA-HV-A12-JC7-H	2	12	No	3000	1800	10000	15.5#
F1CA-HV-A18-JC7-H	2	18	No	2250	1500	10000	16.2#
F1CA-HV-A24-JC7-H	2	24	No	1750	1100	10000	16.9#

Notes:

1. Custom lengths available, contact factory or local sales representative.
2. Standard hardware includes captured 1/2" x 2" carriage bolt, 1/2" hex nut, 1/2" lock washer, & 1/2" star washer.